


Methacrylic acid ester, for manufacturing polymers and for use as a feed stock for syntheses

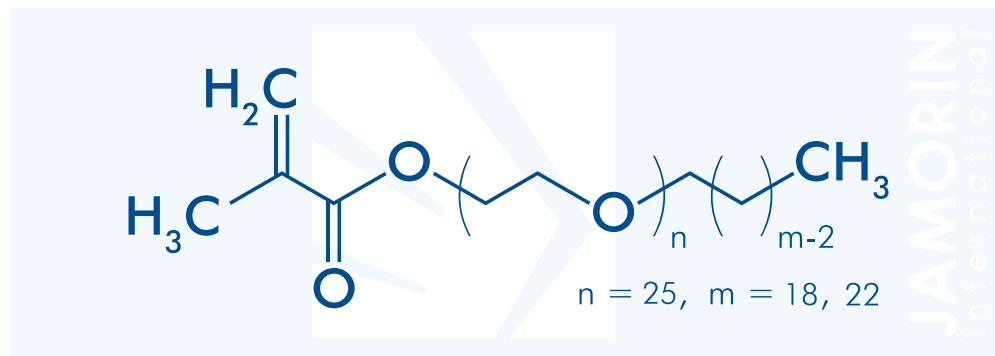

CAS # 125441-87-4

MOLECULAR FORMULA

$C_{72}H_{142}O_{27}$ (C_{72})

$C_{76}H_{150}O_{27}$ (C_{76})

MOLAR MASS

1439.0 g/mol (C_{72})

1495.9 g/mol (C_{76})

PRODUCT SPECIFICATION

Properties	Typical	Method
Assay	50 ± 3 %	NMR
Water content	25 ± 3 %	ASTM E 203
Acid content (calc. as methacrylic acid)	25 ± 3 %	ASTM D 1613
Color on dispatch	max 100	APHA, ASTM D 1209
Standard stabilization	50 ± 20 ppm MEHQ 175 ± 75 ppm BHT	HPLC

The aforementioned data shall constitute the agreed contractual quality of the product at the time of passing of risk. The data are controlled at regular intervals as part of our quality assurance program. Neither these data nor the properties of product specimens shall imply any legally binding guarantee of certain properties or of fitness for a specific purpose. No liability of ours can be derived therefrom.

OTHER PROPERTIES

Properties	Typical	Method
Appearance	Clear, colorless	
Physical form	Liquid	
Stabilization	< 175 ppm	Topanol A, HPLC
Density @ 20 °C	1.05 g/cm ³	
Melting point	14.5 °C	
pH	3...4.5	

Jamorin has Material Safety Data Sheets (MSDS) for each products. The MSDS contain relevant information needed to safeguard your employees from any known safety and health hazard related with our products. Jamorin provides you MSDS for all the products you evaluate or buy. It is also necessary that you get copies of the MSDS of the other raw materials recommended in our technical bulletins from the suppliers. Your employees should have ready access to and to be trained well on the proper use of MSDS

APPLICATIONS

Behenyl Polyethyleneglycol Methacrylate 1100 (BEPEGMA 1100) forms homopolymers and copolymers. Copolymers of Behenyl Polyethyleneglycol Methacrylate 1100 (BEPEGMA 1100) can be prepared with (meth)acrylic acid and its salts, amides and esters, and with methacrylates, acrylonitrile, maleic acid esters, vinyl acetate, vinyl chloride, vinylidene chloride, styrene, butadiene, unsaturated polyesters and drying oils, etc.

Behenyl Polyethyleneglycol Methacrylate 1100 (BEPEGMA 1100) is also a very useful feedstock for chemical syntheses, because it readily undergoes addition reactions with a wide variety of organic and inorganic compounds.

FEATURES AND BENEFITS

Behenyl Polyethyleneglycol Methacrylate 1100 (BEPEGMA 1100) can be used to impart the following properties to polymers:

- Hydrophobicity / Hydrophilicity
- Rheology modification
- Dispersant

STORAGE & HANDLING

In order to prevent polymerization Behenyl Polyethyleneglycol Methacrylate 1100 (BEPEGMA 1100) must always be stored under air, and never under inert gases. The presence of oxygen is required for the stabilizer to function effectively.

Freezing of Behenyl Polyethyleneglycol Methacrylate 1100 (BEPEGMA 1100) results in segregation of monomer and inhibitor. In addition it is especially important to replenish dissolved oxygen after melting the drummed material prior to use. Replenishment dissolved oxygen and mixing of MEHQ into the monomer can be done using a palette shaker or a drum tumbler.

The melting process requires temperatures of 20 °C or higher but at a maximum of 35 °C as the heating temperature. Warming the product in a room of 20...25 °C over several days is the preferred option. As an alternative if faster melting is required heating cabinets using hot water or hot oil are

the preferred apparatus for thawing process of Behenyl Polyethyleneglycol Methacrylate 1100 (BEPEGMA 1100) since this avoids hot spots. Local hot spots of more than 35 °C may result in premature aging of material. Product temperatures of more than 45 °C may result in a runaway polymerization of the monomer.

During storage as a molten liquid it is advisable to replenish the dissolved oxygen content on a weekly basis. Behenyl Polyethyleneglycol Methacrylate 1100 (BEPEGMA 1100) has to contain a stabilizer and the storage temperature must not exceed 20 °C to prevent premature quality degradation. If the above mentioned conditions are met a storage stability Behenyl Polyethyleneglycol Methacrylate 1100 (BEPEGMA 1100) of 6 months can be expected upon delivery.

SAFETY

A Safety Data Sheet has been compiled for Behenyl Polyethyleneglycol Methacrylate 1100 (BEPEGMA 1100) that contains up-to-date information on questions relevant to safety.

PACKAGING

It can be purchased in bulk and 200L drum. Special packing can be arranged.

NOTE

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

DISCLAIMER «It is in good faith that we offer suggestions on the use of our products and these are based on knowledge we believe are correct and dependable. However, these are with no guarantee as process and conditions in the use of our products may vary and are beyond our control. We strongly recommend that users of our products verify the appropriateness of our suggestions before using them on a commercial scale».

COPYRIGHT PROTECTION STATEMENT 2020, All right reserved

